


# Single row deep groove ball bearings

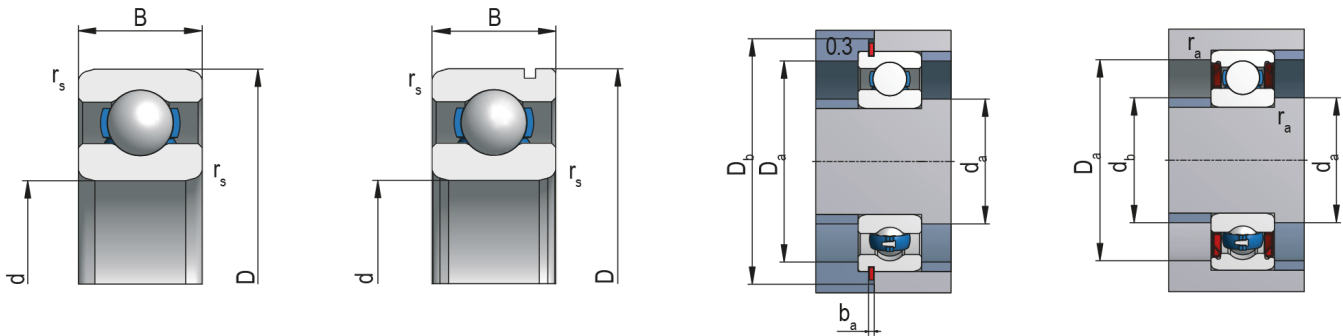

## Bearing Designation

629; 629-2ZR; 629-2RSR

## Dimensions (mm)

d	9
D	26
B	8
B <sub>1</sub>	8
r <sub>s</sub> min	0,3

## Abutment and Fillet Dimensions (mm)

d <sub>a</sub> min	11
D <sub>a</sub> max	24
r <sub>a</sub> max	0,3

## Basic Load Rating (kN)

C	3,6
C <sub>0</sub>	1,96

## Limiting Speed for Lubrication (min<sup>-1</sup>)

Grease Z, ZR	35 000
Grease RS, RSR	21 000
Oil	42 000

## Weight [kg]

0,018

## Tolerance Class

Tolerance Class	Inner Ring									
	Cylindrical Bore									
	$\Delta_{dmp}$		$V_{dp}$			$V_{dmp}$	$K_{ia}$	$\Delta_{B_s}$		$V_{B_s}$
			Diameter Series							
			7,8,9	0,1	2,3,4					
max	min	max	max	max	max	max	min	max		
$\mu m$										
P0	0	-8	10	8	6	6	10	0	-120	15
P6	0	-7	9	7	5	5	6	0	-120	15

Tolerance Class	Inner Ring														
	Tapered Bore 1:12					Tapered Bore 1:30									
	$\Delta_{dmp}$		$\Delta_{d1mp} - \Delta_{dmp}$		$V_{dp}^{1)}$	$\Delta_{dmp}$		$\Delta_{d1mp} - \Delta_{dmp}$		$V_{dp}^{1)}$					
											max	min	max	min	max
											max	min	max	min	max
$\mu m$															
P0 = P6	-	-	-	-	-	-	-	-	-	-					

Tolerance Class	Outer Ring									
	$\Delta_{Dmp}$		$V_{Dp}$			bearings <sup>2)</sup> with seals	$V_{Dmp}$	$K_{ea}$	$\Delta_{CS}, V_{CS}$	
			Diameter Series							
			7,8,9	0,1	2,3,4					
	max	min	max	max	max	max	max			
$\mu m$										
P0	0	-9	12	9	7	12	7	15	Corresponds to $\Delta_{B_s}, V_{B_s}$ of the same bearing inner ring	
P6	0	-8	10	8	6	10	6	9		

1) Valid in any bore radial plane

2) P0 - Valid only for bearings in diameter series 2, 3 and 4 \* P6 - Valid only for bearings in diameter series 0, 1, 2, 3 and 4

## Radial Clearance

C2		normal		C3		C4		C5			min	max
min	max	min	max	min	max	min	max	min	max			
$\mu m$												
0	7	2	13	8	23	14	29	20	37	E10, E12	15	30

## Tolerance Symbols and Their Meaning

$d$	nominal bore diameter	$H_4$	rated height of spherical-roller bearing
$d_1$	nominal diameter of larger theoretical tapered bore diameter	$\Delta_{B_s}$	inner ring single width deviation
$d_2$	nominal diameter of the shaft washer of double direction thrust bearings	$\Delta_{C_s}$	outer ring single width deviation
$\Delta_{ds}$	deviation of single bore diameter from nominal	$\Delta_{T_s}$	bearing single width deviation (total)
$\Delta_{dmp}$	mean cylindrical bore diameter deviation in single radial plane (for tapered bore $\Delta_{dmp}$ is valid for theoretical bore diameter)	$\Delta_{T_{1s}}$	cone sub-unit effective width deviation
$\Delta_{d1mp}$	deviation of mean larger theoretical diameter of tapered bore	$\Delta_{T_{2s}}$	cup sub-unit effective width deviation
$\Delta_{d2mp}$	mean shaft washer bore diameter deviation of double direction thrust bearings in single radial plane	$\Delta_{H_s}$	height deviation of single direction axial bearings from nominal value
$V_{dp}$	single bore diameter variation in single radial plane	$\Delta_{H_{1s}}$	height deviation of single direction axial ball bearings with sphered housing washer from nominal value
$V_{dmp}$	mean cylindrical bore diameter variation	$\Delta_{H_{2s}}$	height deviation of double direction axial bearings from nominal value
$V_{d2p}$	shaft washer bore diameter variation of double direction thrust bearings in single radial plane	$\Delta_{H_{3s}}$	height deviation of double direction axial ball bearings with sphered housing washer from nominal value
$D$	nominal outside diameter	$\Delta_{H_{4s}}$	height deviation of axial spherical-roller bearing from the rated value
$\Delta_{Ds}$	deviation of single outside diameter from the nominal dimension	$C$	outer ring nominal width
$\Delta_{Dmp}$	mean outside cylindrical surface diameter deviation in single plane	$V_{B_s}$	inner ring single width variation
$V_{Dp}$	single outside cylindrical surface diameter variation in single radial plane	$V_{C_s}$	outer ring single width variation
$V_{Dmp}$	mean outside cylindrical surface diameter variation	$K$	radial runout of assembled bearing inner ring
$B$	inner ring nominal width	$K^a$	radial runout of assembled bearing outer ring
$T$	total nominal width of tapered roller bearings	$S^{ea}$	shaft washer raceway axial runout
$T_1$	nominal effective width of cup sub-unit	$S_i$	housing washer raceway axial runout
$T_2$	nominal effective width of cone sub-unit	$S^e$	inner ring flat seat face axial runout of assembled bearing
$H$	rated width of unidirectional axial bearing	$S^{ia}$	outer ring flat seat face axial runout of assembled bearing
$H_1$	rated height of unidirectional ball axial bearing including the body ring	$S^{ea}$	flat seat face axial runout
$H_2$	rated height of bidirectional axial bearing	$S_d$	runout of outside cylindrical surface towards outer ring face
$H_3$	rated height of bidirectional axial ball bearing including body rings	$S_D$	runout of supporting face towards seat face for single row tapered roller bearings
		$S_s$	