


Single row four-point angular contact ball bearings

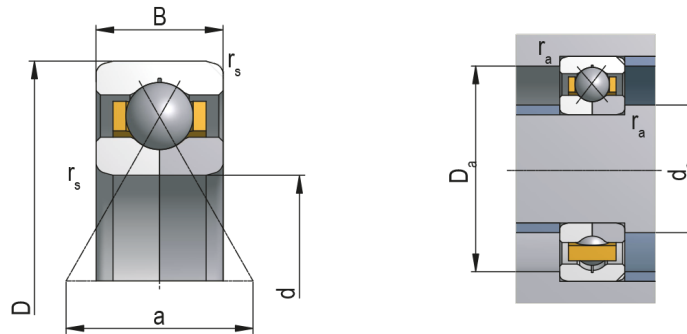

Bearing Designation QJ307MA

Dimensions (mm)

| | |
|--------------------|-----|
| d | 35 |
| D | 80 |
| B | 21 |
| r _s min | 1,5 |
| a | 40 |

Abutment and Fillet Dimensions (mm)

| | |
|--------------------|------|
| d _a min | 50 |
| D _a max | 65,2 |
| r _a max | 1,5 |

Basic Load Rating (kN)

| | |
|----------------|-------|
| C | 67,28 |
| C ₀ | 50,69 |

Limiting Speed for Lubrication (min⁻¹)

| | |
|--------|-------|
| Grease | 6 000 |
| Oil | 6 600 |

Weight [kg] 0,570

Tolerance Class

| Tolerance Class | Inner Ring | | | | | | | | | |
|-----------------|------------------|-----|-----------------|-----|-------|-----------|----------|---------------|------|----------|
| | Cylindrical Bore | | | | | | | | | |
| | Δ_{dmp} | | V_{dp} | | | V_{dmp} | K_{ia} | Δ_{Bs} | | V_{Bs} |
| | | | Diameter Series | | | | | | | |
| | | | 7,8,9 | 0,1 | 2,3,4 | | | | | |
| max | min | max | max | max | max | max | min | max | | |
| μm | | | | | | | | | | |
| P0 | 0 | -12 | 15 | 12 | 9 | 9 | 15 | 0 | -120 | 20 |
| P6 | 0 | -10 | 13 | 10 | 8 | 8 | 10 | 0 | -120 | 20 |

| Tolerance Class | Inner Ring | | | | | | | | | | | | | | |
|-----------------|-------------------|---|--------------------------------|---|---------------|-------------------|---|--------------------------------|---|---------------|-----|-----|-----|-----|-----|
| | Tapered Bore 1:12 | | | | | Tapered Bore 1:30 | | | | | | | | | |
| | Δ_{dmp} | | $\Delta_{d1mp} - \Delta_{dmp}$ | | $V_{dp}^{1)}$ | Δ_{dmp} | | $\Delta_{d1mp} - \Delta_{dmp}$ | | $V_{dp}^{1)}$ | | | | | |
| | | | | | | | | | | | max | min | max | min | max |
| | | | | | | | | | | | max | min | max | min | max |
| μm | | | | | | | | | | | | | | | |
| P0 = P6 | 25 | 0 | 25 | 0 | 15 | - | - | - | - | - | | | | | |

| Tolerance Class | Outer Ring | | | | | | | | | |
|-----------------|----------------|-----|-----------------|-----|-------|--------------------------------------|-----------|----------|---|--|
| | Δ_{Dmp} | | V_{Dp} | | | bearings ²⁾ with seals | V_{Dmp} | K_{ea} | Δ_{CS}, V_{CS} | |
| | | | Diameter Series | | | | | | | |
| | | | 7,8,9 | 0,1 | 2,3,4 | | | | | |
| | max | min | max | max | max | max | max | | | |
| μm | | | | | | | | | | |
| P0 | 0 | -13 | 16 | 13 | 10 | 20 | 10 | 25 | Corresponds to Δ_{BS}, V_{BS} of the same bearing inner ring | |
| P6 | 0 | -11 | 14 | 11 | 8 | 16 | 8 | 13 | | |

1) Valid in any bore radial plane

2) P0 - Valid only for bearings in diameter series 2, 3 and 4 * P6 - Valid only for bearings in diameter series 0, 1, 2, 3 and 4

Axial Clearance

| C2 | | normal | | C3 | | C4 | |
|---------|-----|--------|-----|-----|-----|-----|-----|
| min | max | min | max | min | max | min | max |
| μm | | | | | | | |
| 25 | 75 | 65 | 110 | 100 | 150 | 135 | 185 |

Tolerance Symbols and Their Meaning

| | | | |
|-----------------|---|----------------|---|
| d | nominal bore diameter | H_4 | rated height of spherical-roller bearing |
| d_1 | nominal diameter of larger theoretical tapered bore diameter | Δ_{Bs} | inner ring single width deviation |
| d_2 | nominal diameter of the shaft washer of double direction thrust bearings | Δ_{Cs} | outer ring single width deviation |
| Δ_{ds} | deviation of single bore diameter from nominal | Δ_{Is} | bearing single width deviation (total) |
| Δ_{dmp} | mean cylindrical bore diameter deviation in single radial plane (for tapered bore Δ_{dmp} is valid for theoretical bore diameter) | Δ_{T1s} | cone sub-unit effective width deviation |
| Δ_{d1mp} | deviation of mean larger theoretical diameter of tapered bore | Δ_{T2s} | cup sub-unit effective width deviation |
| Δ_{d2mp} | mean shaft washer bore diameter deviation of double direction thrust bearings in single radial plane | Δ_{Hs} | height deviation of single direction axial bearings from nominal value |
| V_{dp} | single bore diameter variation in single radial plane | Δ_{H1s} | height deviation of single direction axial ball bearings with sphered housing washer from nominal value |
| V_{dmp} | mean cylindrical bore diameter variation | Δ_{H2s} | height deviation of double direction axial bearings from nominal value |
| V_{d2p} | shaft washer bore diameter variation of double direction thrust bearings in single radial plane | Δ_{H3s} | height deviation of double direction axial ball bearings with sphered housing washer from nominal value |
| D | nominal outside diameter | Δ_{H4s} | height deviation of axial spherical-roller bearing from the rated value |
| Δ_{Ds} | deviation of single outside diameter from the nominal dimension | C | outer ring nominal width |
| Δ_{Dmp} | mean outside cylindrical surface diameter deviation in single plane | V_{Bs} | inner ring single width variation |
| V_{Dp} | single outside cylindrical surface diameter variation in single radial plane | V_{Cs} | outer ring single width variation |
| V_{Dmp} | mean outside cylindrical surface diameter variation | K^{ia} | radial runout of assembled bearing inner ring |
| B | inner ring nominal width | K^{ea} | radial runout of assembled bearing outer ring |
| T | total nominal width of tapered roller bearings | S_t^{ea} | shaft washer raceway axial runout |
| T_1 | nominal effective width of cup sub-unit | S_t^e | housing washer raceway axial runout |
| T_2 | nominal effective width of cone sub-unit | S_{ia}^e | inner ring flat seat face axial runout of assembled bearing |
| H | rated width of unidirectional axial bearing | S_{ea}^e | outer ring flat seat face axial runout of assembled bearing |
| H_1 | rated height of unidirectional ball axial bearing including the body ring | S_d^{ea} | flat seat face axial runout |
| H_2 | rated height of bidirectional axial bearing | S_D | runout of outside cylindrical surface towards outer ring face |
| H_3 | rated height of bidirectional axial ball bearing including body rings | S_s | runout of supporting face towards seat face for single row tapered roller bearings |