


# Cam followers

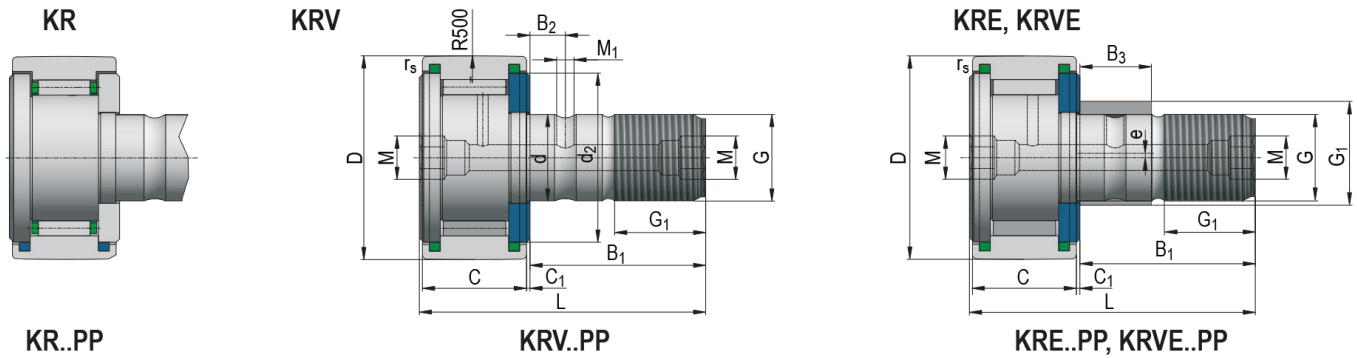

**Bearing Designation**      **KR30PP;    KRE30PP**

## Dimensions (mm)

<b>D</b>	30	<b>B</b>	40
<b>d</b>	12	<b>B<sub>1</sub></b>	25,00
<b>C</b>	14	<b>B<sub>2</sub></b>	6
<b>r<sub>s min</sub></b>	0,60	<b>B<sub>3</sub></b>	11
<b>G</b>	M12x1,5	<b>C<sub>1</sub></b>	0,6
<b>G<sub>1</sub></b>	13	<b>d<sub>2</sub></b>	23
<b>M</b>	6	<b>d<sub>1 h9</sub></b>	15
<b>M<sub>1</sub></b>	3	<b>e</b>	0,5

## Basic Load Rating (kN)

<b>C</b>	8,10
<b>C<sub>0</sub></b>	9,70

## Limiting Speed for Lubrication (min<sup>-1</sup>)

<b>Oil</b>	8300
------------	------

## Weight (g)

<b>KR30PP</b>	87,00
<b>KRE30PP</b>	92,50